

## Quick Start Guide

• Supplement •

# DESK / WALL MOUNT

## INSTRUCTIONS

NX-1700

### Before You Begin

- ❑ Check your packing slip to verify that you have all the necessary items.
- ❑ Make sure you have a standard Phillips screwdriver.

- You can mount the chassis either horizontally under a desk or vertically onto a wall.
- The rack mount kit includes:
  - 1 rack
  - 4 x M5 cage nuts
  - 4 x M5 cabinet screws
  - 6 x 1" self-tapping screws [for desk mount]
  - 6 x 1 1/2" self-tapping screws [for wall mount] (wood surfaces only)
- Because the NX-1700 has more than one possible physical chassis, the photos may not look like the model you have. However, all NX-1700s use the same rack, with the same method of attachment.

### To mount the rack and the NX-1700:


1. Ensure that the mounting surface (wall or underside of desk) is sturdy enough to support the weight of the NX-1700 and the rack.
2. Test fit the rack to the surface to ensure proper fit, and mark the 6 mounting points.




3. **For wood surfaces only**, use the provided self-tapping screws to affix the rack to the mounting surface. If you're using another type of surface, obtain and use the appropriate screws.
4. Once the rack is properly mounted to the surface, you can install the NX-1700.
5. Use the supplied square cage nuts to provide the mounting points for the appliance.
6. Place the appliance on to the outside face of the rack.
7. Secure the appliance to the rack with the supplied cabinet screws.

If only using two screws on each side, secure the top and bottom holes for greater stability.

### Exploded view of mounting components

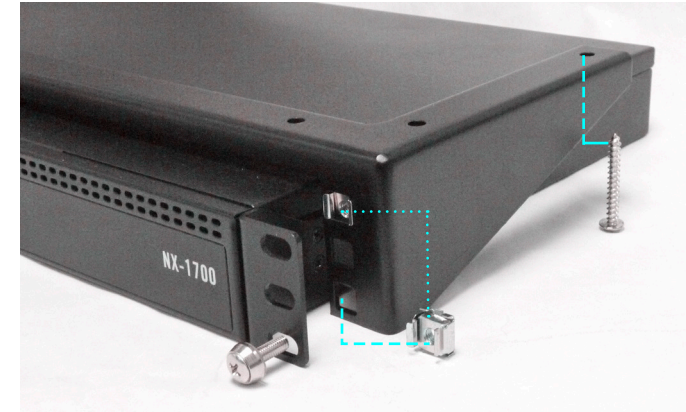

### Horizontal positioning under desk

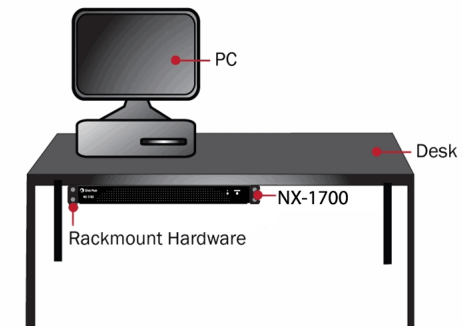

### Wall mount positioning



Secure 3 screws on each side.



Silver Peak Systems, Inc.  
2860 De La Cruz Boulevard  
Suite 100  
Santa Clara, CA 95050

1.877.210.7325 (toll-free in USA)  
+1.408.935.1850  
www.silver-peak.com/support